


CP-884A

Remote Control

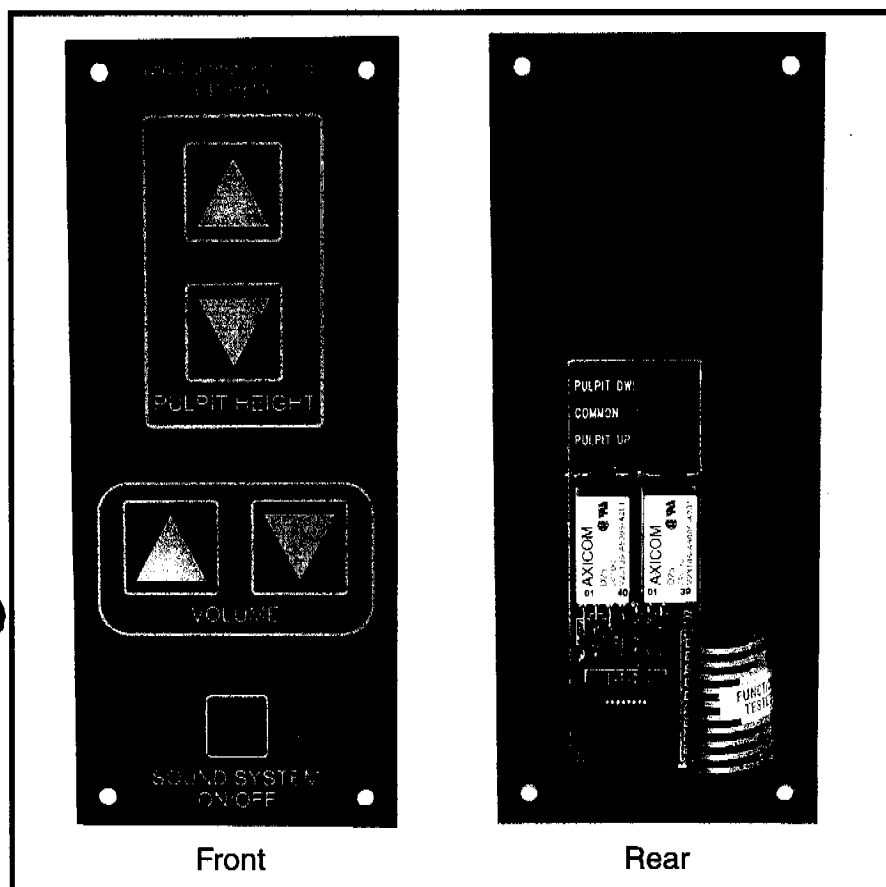


The CP-884A remote control is intended for use in Ivie LDS meetinghouse audio systems. The CP-884A provides the remote control functions for the Chapel portion of the system and replaces the CP-884. Connection to the CP-884A is by means of RJ45 connector.

The connection to the podium Up/Down controls is via a three pin euro block connector. The CP-884A provides a switched +24Vdc to the podium.


Specifications

Electrical: LED 24Vdc
All switches - SPST momentary
Podium Up/Down supplies +24Vdc



Physical: Color - Brown & Gold
Size - W 2.5 in H 6.0 in
(no escutcheon supplied)

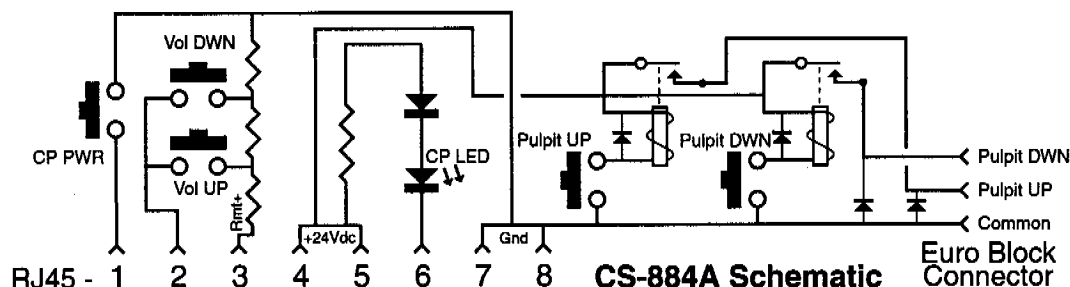

CP-884A connection to Ivie 884-IF

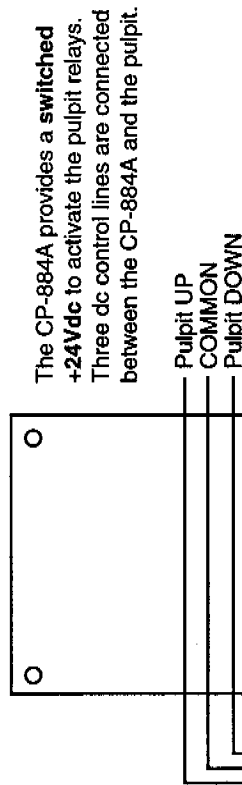


884-IF

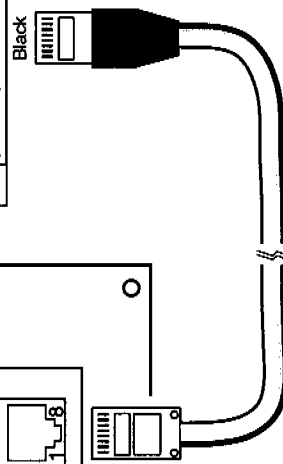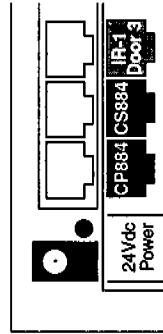


Wiring between the CP-884A and the 884IF is accomplished using a conventional CAT-5 cable conforming to the EIA 568B standard.

EIA/ 568B Color Code for RJ45

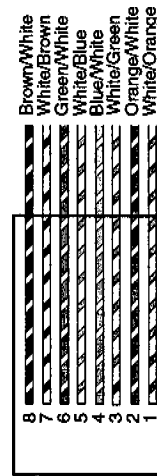

Contact side showing
Tab on back

CP-884A connection to Ivie 884+ and external 24Vdc power supply

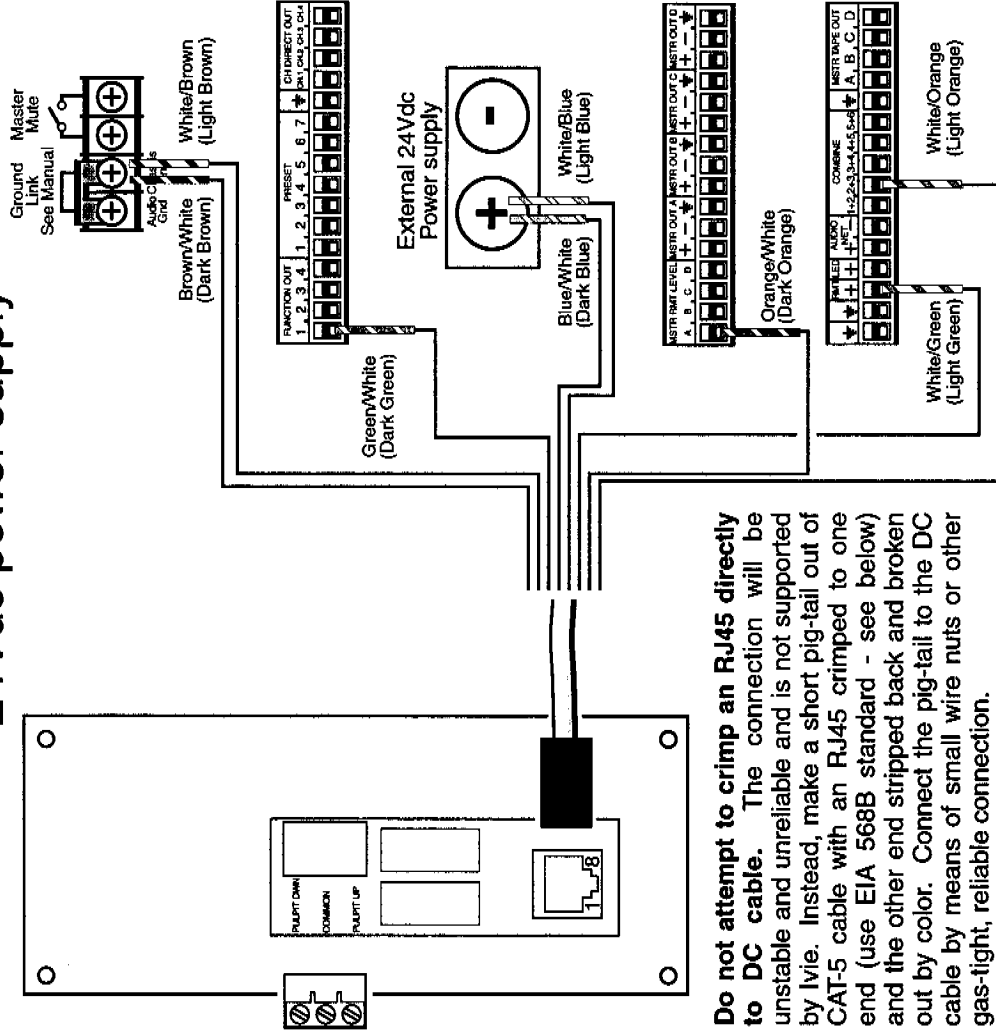

Do not attempt to crimp an RJ45 directly to DC cable. The connection will be unstable and unreliable and is not supported by Ivie. Instead, make a short pig-tail out of CAT-5 cable with an RJ45 crimped to one end (use EIA 568B standard - see below) and the other end stripped back and broken out by color. Connect the pig-tail to the DC cable by means of small wire nuts or other gas-tight, reliable connection.

